
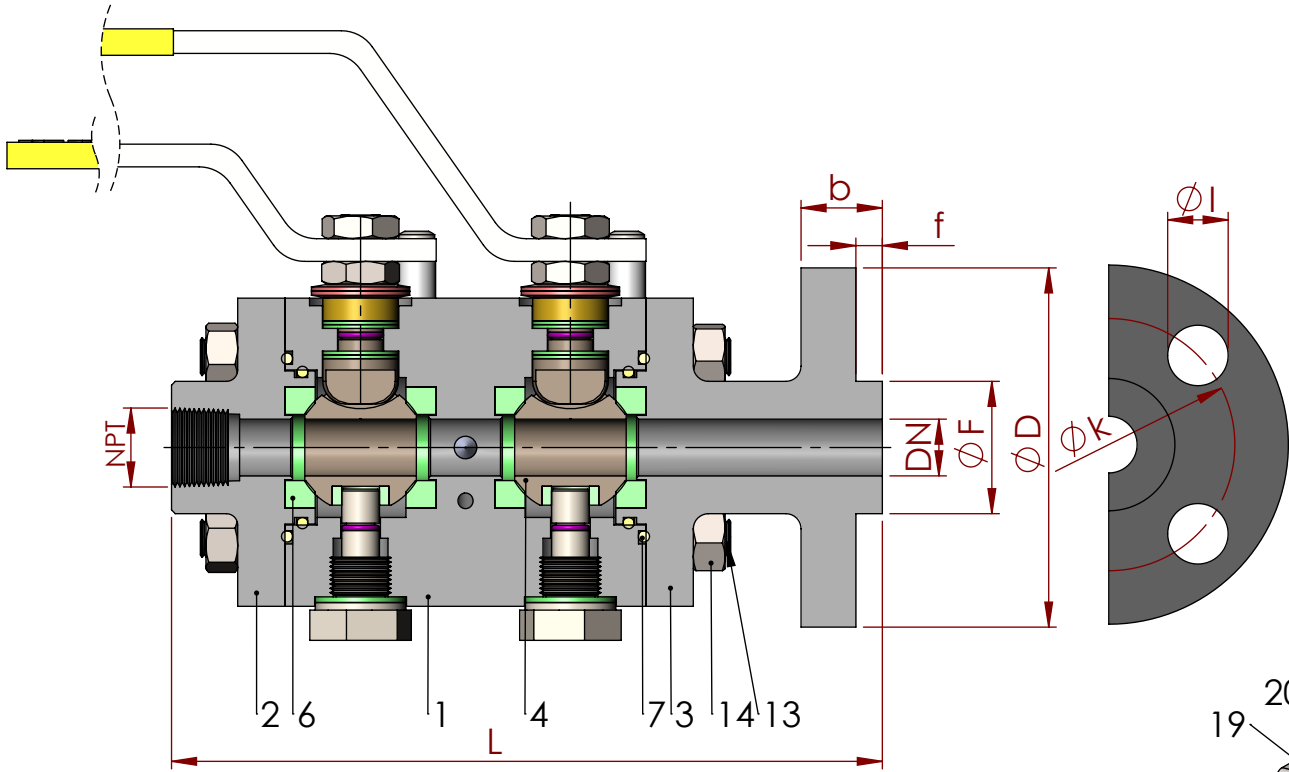
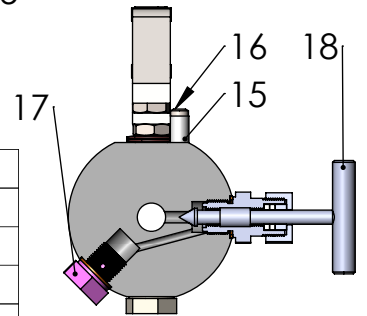



**DN 15 - DN 80 CLASS 300 ( PN 50 )**
**TAM GEÇİŞLİ / FLANŞ - DIŞLI**  
**FLANGED - FEMALE NPT THREADED**


| NO      | PARÇA ADI                  | MALZEME    |
|---------|----------------------------|------------|
| ITEM NO | ITEM DESCRIPTION           | MATERIAL   |
| 20      | PLASTİK KAPLAMA            | PVC        |
| 19      | KÜRE HAREKET KOLU          | ST 37      |
| 18      | İĞNELİ VANA                | AISI 304   |
| 17      | VENT                       | AISI 304   |
| 16      | CİVATA                     | ST 42      |
| 15      | STOPLAMA PİMİ              | ST 42      |
| 14      | SOMUN                      | 5.6.       |
| 13      | SAPLAMA                    | 4140-5140  |
| 12      | KONTRA SOMUN               | AISI 304   |
| 11      | ÇANAK PUL                  | AISI 304   |
| 10      | BASKI RİNGİ                | AIS 304    |
| 9       | MİL O-RİNGİ                | VITON      |
| 8       | BOĞAZ SIZDIRMAZLIK TEFLONU | PTFE       |
| 7       | GÖVDE SIZDIRMAZLIK TEFLONU | VITON      |
| 6       | KÜRE SIZDIRMAZLIK TEFLONU  | PTFE       |
| 5       | HAREKET MİLİ               | ASTM A 105 |
| 4       | KÜRE                       | AISI 316   |
| 3       | KAPAK                      | ASTM A 105 |
| 2       | KAPAK                      | ASTM A 105 |
| 1       | GÖVDE                      | ASTM A 105 |

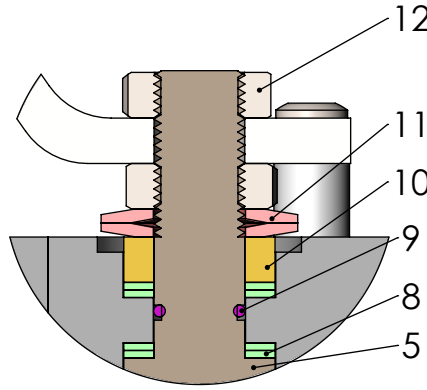

|                   |                     |                      |
|-------------------|---------------------|----------------------|
| Dizayn            | Design              | : API 6D / ISO 14313 |
| Boyut             | Dimensions          | : ASME B 16.10       |
| Bağlantılar       | Connections         | : ASME B 16.5        |
| Çalışma Basıncı   | Working Pressure    | : CLASS 300 (PN 50)  |
| Çalışma Sıcaklığı | Working Temperature | : -29 °C/ +180 °C    |

**BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES**
**CLASS 300 ( PN 50 )**

|              |                 | L   | f | D   | b    | k     | HOLE UNIT | I    | F    |
|--------------|-----------------|-----|---|-----|------|-------|-----------|------|------|
| <b>DN 15</b> | <b>R 1/2"</b>   | 181 | 2 | 95  | 14,3 | 66,7  | 4         | 15,7 | 35,1 |
| <b>DN 20</b> | <b>R 3/4"</b>   | 183 | 2 | 115 | 15,9 | 82,6  | 4         | 19,1 | 42,9 |
| <b>DN 25</b> | <b>R 1"</b>     | 185 | 2 | 125 | 17,5 | 88,9  | 4         | 19,1 | 50,8 |
| <b>DN 40</b> | <b>R 1-1/2"</b> | 188 | 2 | 155 | 20,7 | 114,3 | 4         | 22,4 | 73,2 |
| <b>DN 50</b> | <b>R 2"</b>     | 190 | 2 | 165 | 22,3 | 127   | 8         | 19,1 | 91,9 |
| <b>DN 80</b> | <b>R 3"</b>     | 197 | 2 | 210 | 28,6 | 168,3 | 8         | 22,4 | 127  |